



# BEAUTY & QUALITY... NATURALLY BY




## REBUTTED/REJOINTED Shingles

## MACHINE GROOVED Shakes



These products are manufactured specifically for exterior and interior wall surface uses. They are a low maintenance product that adds beauty, texture, durability and insulating qualities to either new construction or remodelling and renovation of existing structures

**Watkins  
Sawmills  
Ltd.**

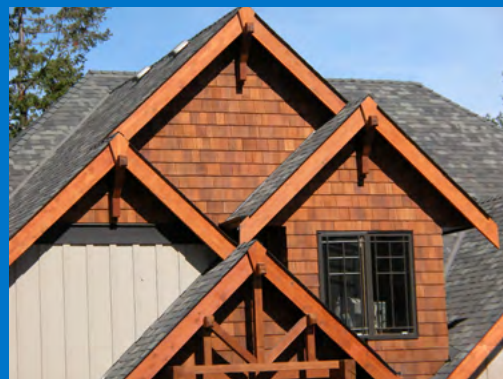

Beautiful • Durable • Insulative • Wind Resistant  
Withstands Thermal Shock • Impact Resistant • Light Weight

# MACHINE GROOVED Shingles

**Appearance:** Machine grooved for a shake texture from Number 1 Grade Blue Label CERTIGRADE red cedar shingles, trimmed for parallel edges with butts sawn at right angles.

**Finishes:** Natural, primed white, primed gray, or special order colors.

**Lengths:** 16-inch, 18-inch and 24-inch.

## NUMBER 1 GRADE, BLUE LABEL

**Description:** Lengths 16-inch, 18-inch, 24-inch; width 14" maximum, 4" minimum; thickness of 16-inch is 5/2" ( 5 butts together measures 2" thick), 18-inch is 5/2-1/4" thick, 24-inch is 4/2" thick.  
Clear heartwood: 100% edge grain; no defects.

**Recommended Use:** For exterior or interior walls where a superior quality product is desired.

**Wall Exposure Table:**

Shingle Length	Max. Weather Exposure	
	Single Course	Double Course
16"	7"	12"
18"	8"	14"
24"	10½"	16"

# REBUTTED/REJOINTED Shingles

**Appearance:** Manufactured from Number 1 Grade Blue label or Number 2 Grade Red label CERTIGRADE red cedar shingles, trimmed for parallel edges with butts sawn at right angles. Available in both sawn and sanded face textures.

**Finishes:** Natural, primed white, primed gray, or special order colors.

**Lengths:** 16-inch, 18-inch and 24-inch.

## NUMBER 1 GRADE, BLUE LABEL

**Description:** Lengths 16-inch, 18-inch, 24-inch; width 14" maximum, 4" minimum; thickness of 16-inch is 5/2" ( 5 butts together measures 2" thick), 18-inch is 5/2-1/4" thick, 24-inch is 4/2" thick. Clear heartwood: 100% edge grain; no defects.

**Recommended Use:** For exterior or interior walls where a superior quality product is desired.

## NUMBER 2 GRADE, RED LABEL

**Description:** Lengths 16-inch, 18-inch, 24-inch; thickness of 16-inch is 5/2" ( 5 butts together measures 2" thick), 18-inch is 5/2-1/4" thick, 24-inch is 4/2" thick. Width 14" maximum, 4" minimum; Face must be 10", 11" and 16" or better on 16-inch, 18-inch and 24-inch shingles, respectively. Limited sapwood and flat grain are allowed. Limited knots and defects are allowed above the clear portion.

**Recommended Use:** For exterior or interior walls where a good quality product is desired.

**Wall Exposure Table-**

**No. 1 Grade, Blue Label\*:**

Shingle Length	Max. Weather Exposure	
	Single Course	Double Course
16"	7"	12"
18"	8"	14"
24"	10½"	16"

\*Maximum weather exposure for No. 2 Grade, Red Label Rebutted and Rejointed shingles should be in accordance with the manufacturer's recommendations.

- These red cedar shakes and shingles are manufactured in accordance with standards established by the Cedar Shake and Shingle Bureau.
- This is only a product description necessary for selection of materials and grades.  
For a new roof construction manual and/or wall manual please contact:

Watkins  
Sawmills  
Ltd.

PO Box 314, Sumas, WA USA 98295  
Telephone: (604) 462-7116 • Fax: (604) 462-7162  
Email: Sales@watkinsawmills.com  
Toll Free: 1-800-663-8301



PO Box 3280, Mission, British Columbia V2V 4J4  
Telephone: (604) 462-7116 • Fax: (604) 462-7162  
Email: Sales@watkinsawmills.com  
Toll Free: 1-800-663-8301